




## 40x40x15mm

- ◆ 产品系列 ..... JC4015-02
- ◆ 扇叶材料 ..... PBT 94V-0
- ◆ 扇框材料 ..... PBT 94V-0
- ◆ 轴承结构 ..... 双滚珠(B)
- ◆ 工作温度 ..... -10°C - 70°C

| 型号<br>Model | 电压<br>Rated voltage<br>[V] | 电流<br>Rated current<br>[mA] | 功率<br>Rated input<br>[W] | 转速<br>Rated speed<br>[R.P.M] | 风量<br>Air flow<br>[CFM] | 风压<br>Static pressure<br>[inchH2O] | 噪音<br>Noise<br>[dBA] |
|-------------|----------------------------|-----------------------------|--------------------------|------------------------------|-------------------------|------------------------------------|----------------------|
| JC4015B5L2  | 5                          | 100                         | 0.50                     | 4200                         | 4.4                     | 0.061                              | 17.4                 |
| JC4015B5M2  |                            | 200                         | 1.00                     | 7800                         | 8.2                     | 0.210                              | 30.9                 |
| JC4015B5H2  |                            | 300                         | 1.50                     | 10200                        | 10.7                    | 0.360                              | 36.7                 |
| JC4015B5S2  |                            | 520                         | 2.60                     | 13600                        | 14.2                    | 0.640                              | 43.0                 |
| JC4015B5U2  |                            | 920                         | 4.60                     | 17000                        | 17.8                    | 0.980                              | 47.8                 |
| JC4015B12L2 | 12                         | 40                          | 0.48                     | 4200                         | 4.4                     | 0.061                              | 17.4                 |
| JC4015B12M2 |                            | 79                          | 0.95                     | 7800                         | 8.2                     | 0.210                              | 30.9                 |
| JC4015B12H2 |                            | 120                         | 1.44                     | 10200                        | 10.7                    | 0.360                              | 36.7                 |
| JC4015B12S2 |                            | 200                         | 2.40                     | 13600                        | 14.2                    | 0.640                              | 43.0                 |
| JC4015B12U2 |                            | 422                         | 5.06                     | 17000                        | 17.8                    | 0.980                              | 47.8                 |
| JC4015B24L2 | 24                         | 22                          | 0.53                     | 4200                         | 4.4                     | 0.061                              | 17.4                 |
| JC4015B24M2 |                            | 40                          | 0.96                     | 7800                         | 8.2                     | 0.210                              | 30.9                 |
| JC4015B24H2 |                            | 60                          | 1.44                     | 10200                        | 10.7                    | 0.360                              | 36.7                 |
| JC4015B24S2 |                            | 104                         | 2.50                     | 13600                        | 14.2                    | 0.640                              | 43.0                 |
| JC4015B24U2 |                            | 232                         | 5.57                     | 17000                        | 17.8                    | 0.980                              | 47.8                 |

风量&风压特性曲线

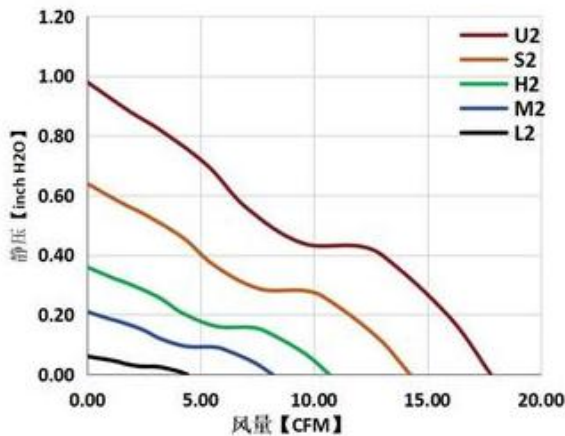

产品结构尺寸

